


PHISHING MADE EASY

Phishing is the starting point for most network and data breaches.

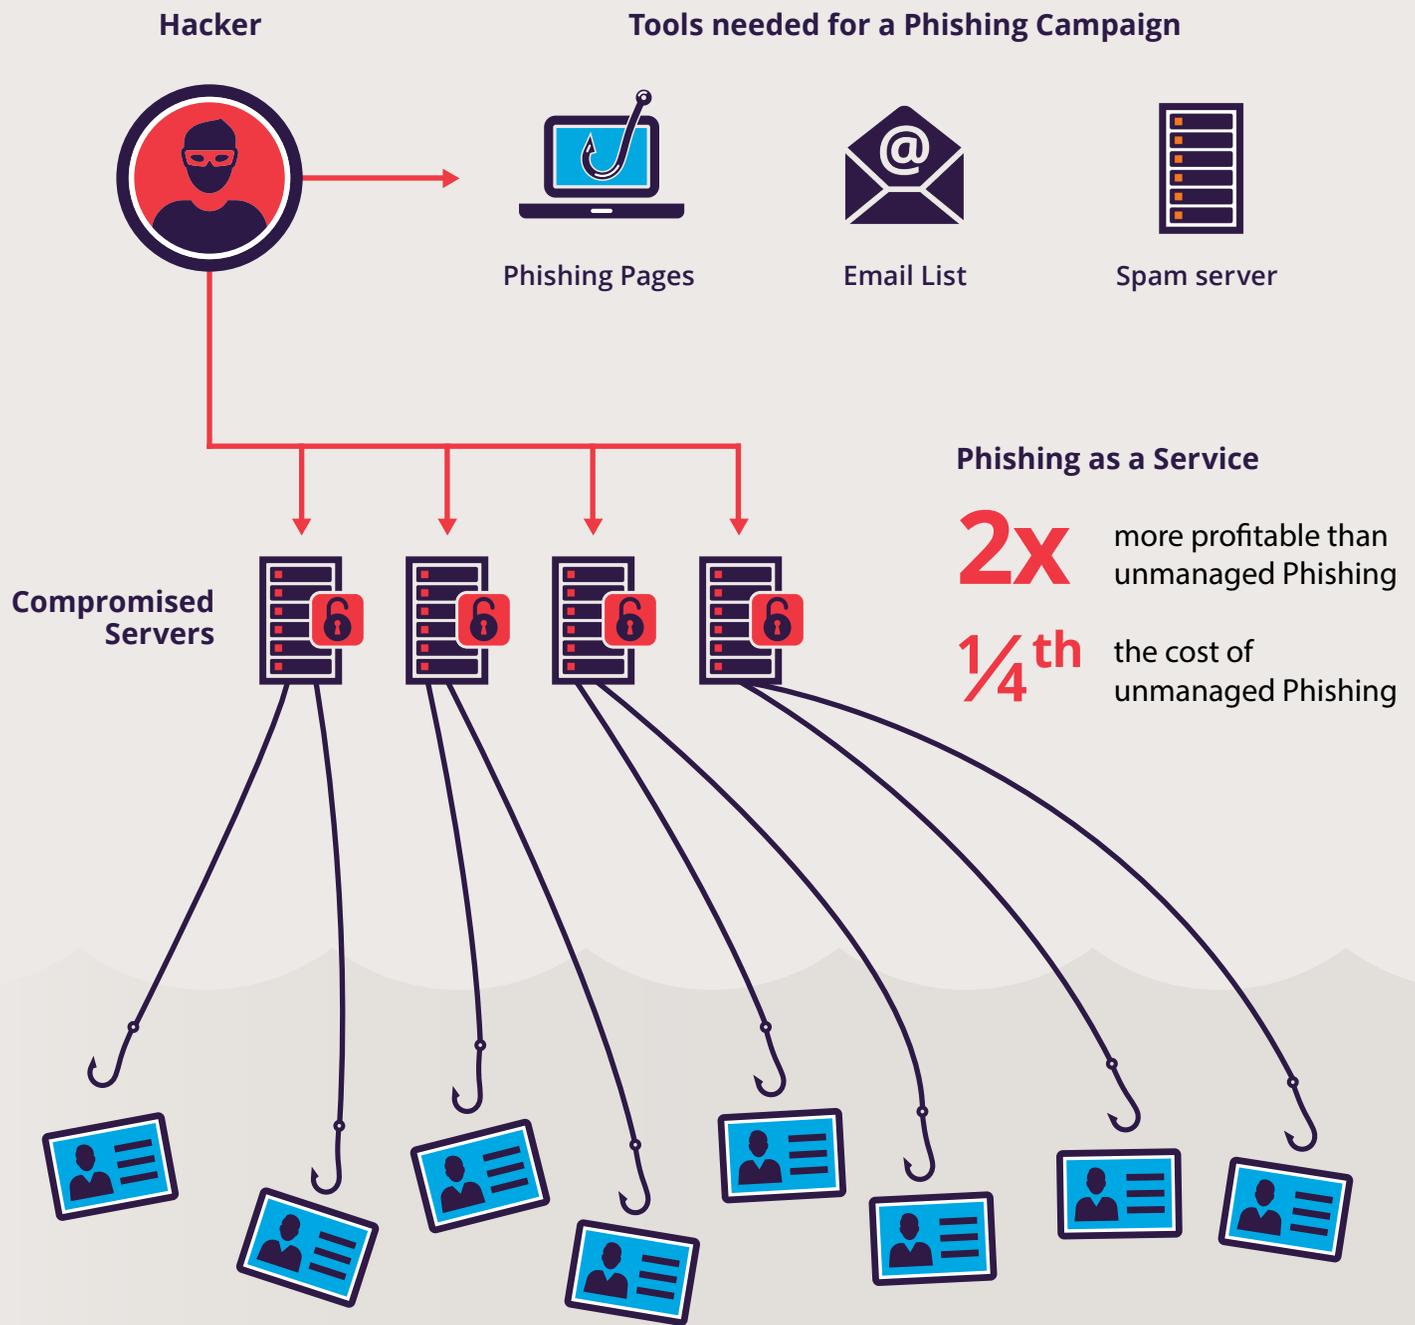

35% of all successful phishing attacks occur between 9am and 12pm

68% of accounts that were breached were not breached previously

The best way to protect web servers from being compromised is to deploy web application firewalls (WAFs) that can detect and block advanced injection techniques. The phishing-based malware distribution mechanism relying on compromised servers can be contained only by increasing the security on web servers. If WAFs were deployed as ubiquitously as network firewalls, the cybercriminal industry would be seriously crippled.

Read the [full report](#) and learn how you can protect yourself from Phishing attacks.